

PT578

PT578 500W DIN-Rail AC/DC power supply for marine and offshore applications



- GL Approved for bridge use (PENDING)
- EN60945 compliant
- Universal input (90 – 265Vac)
- Efficiency above 93%
- Active Power Factor Correction
- Adjustable output
- Overload and overvoltage protection
- Thermal overload protection
- Conformal coating
- DC OK signal and potential free contact
- Cooling by free air convection
- DIN-Rail mounting on back or side
- RoHS compliant
- Internal redundancy diode
- Single or parallel mode user selectable

Features

Input

Input range	90-265 V _{ac} , 125-375 V _{dc}
Frequency	47 – 63 Hz 440 Hz with reduced PFC
Inrush current	30 A; cold start @ 230 V _{ac} / 25°C
Input current	<1.3 A @ 230 V _{ac}
Input fuse	10 AT; internal, not user serviceable
Efficiency	> 93%
Safety ground	
leakage current	<3.5 mA

EMC Specifications

Emissions	EN60945	conducted & radiated
Harmonics	EN61000-3-2	compliant
ESD	EN61000-4-2	Air ± 8 kV Contact ± 6 kV
Electromagnetic fields	EN61000-4-3	10 V/m 8 MHz - 2 GHz
EFT/Burst	EN61000-4-4	2 kV
Surge	EN61000-4-5	Line - Line 0.5 kV Line - GND 1 kV
Conducted immunity	EN61000-4-6	3 VRMS, 150 kHz - 80 MHz
Conducted LF	IEC60533	3 VRMS, 50 Hz - 12 kHz
HV immunity	IEC60947-2	2 kV, 60 s

Output

Output voltage	24 V adjustable 23 - 29 V
Output power	500 W Peak power 750 W (10s)
Minimum load	0 A
Load regulation	±0.5 %
Temperature coefficient	± 0.02 %/°C
Overvoltage protection	32 V
Overload protection	User selectable (see table 1)
Peak short circuit current	40 A (<100 ms)
Overtemperature protection	± 90 °C internal temp.
Turn-on delay	< 2 s @ 90 V _{ac}
DC OK signalling	Green LED on front Potential free contact; active closed; I < 1 A open voltage < 30V


Environmental

Thermal performance	
operating	-25 - +70°C without derating
storage	-40 - +85°C
Humidity	5 - 95%; non-condensing @ +55°C
Conformal coating	
Vibration	Germanischer Lloyd table 3.16 High vibration strain ± 1.6 mm displacement; 2 – 25 Hz 4 g; 25 – 100 Hz (1 octave/min)
Altitude	Max. 10,000 feet; operating Max. 30,000 feet; non-operating


General

Isolation voltage	Input/Output	3000 V _{ac}
	Input/Chassis	2000 V _{ac}
Safety	According to EN60950	
Weight	< 1.8 kg	
Warranty	2 Years	

Front view

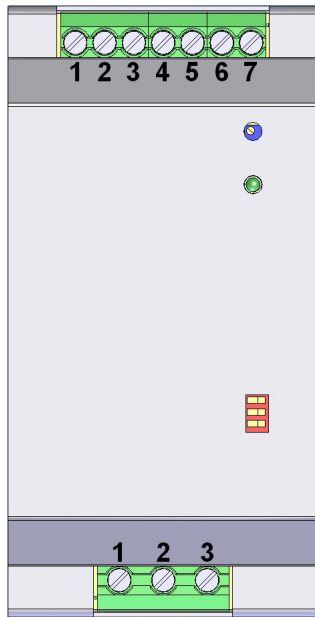

Side view

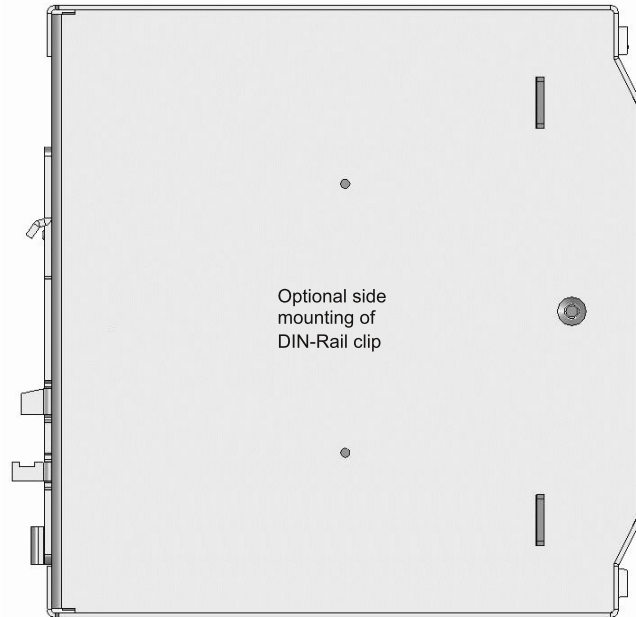

Input Connector

Pin	Function
1	Line
2	Neutral
3	Safety Ground

Dimensions

Length	132 mm
Width	70 mm
Height	128 mm
Excluding DIN-Rail mounting device	
Add 10 mm for standard mounting device and EN50022 DIN-Rail	

Output Connector

Pin	Function
1	DC OK
2	DC OK; Potential Free Contact
3	DC OK; Potential Free Contact
4	Output DC+
5	Output DC+
6	Output DC -
7	Output DC -

Approvals

PENDING: Germanischer Lloyd
 Environmental category: D, EMC1
 Guidelines for the Performance of Type
 Approvals Chapter 2, Edition 2003



Low Voltage Directive 2006/95/EC
 EMC Directive 2004/108/EC

Wire Gauge

AWG	24 - 12
Solid	0.2 - 4 mm ²
Flexible	0.2 - 2.5 mm ²

Dip Switch Settings

Table 1

SW1	SW2	SW3	
OFF	OFF	X	OPTION 1
OFF	ON	X	OPTION 2
ON	OFF	X	OPTION 3
ON	ON	X	OPTION 4

Table 2

SW1	SW2	SW3	
X	X	OFF	SINGLE OPERATION
X	X	ON	PARALLEL OPERATION

ON OFF



OPTION 1: overload results in latched switch off

OPTION 2: overload results in hiccup mode

OPTION 3: overload results in current limit, with latched switch off short circuit protection

OPTION 4: overload results in current limit, with latched switch off short circuit protection

Specifications subject to change without notice

Rev. 2